


## SWVP Submersible Sewage Pumps

### Performance Curves

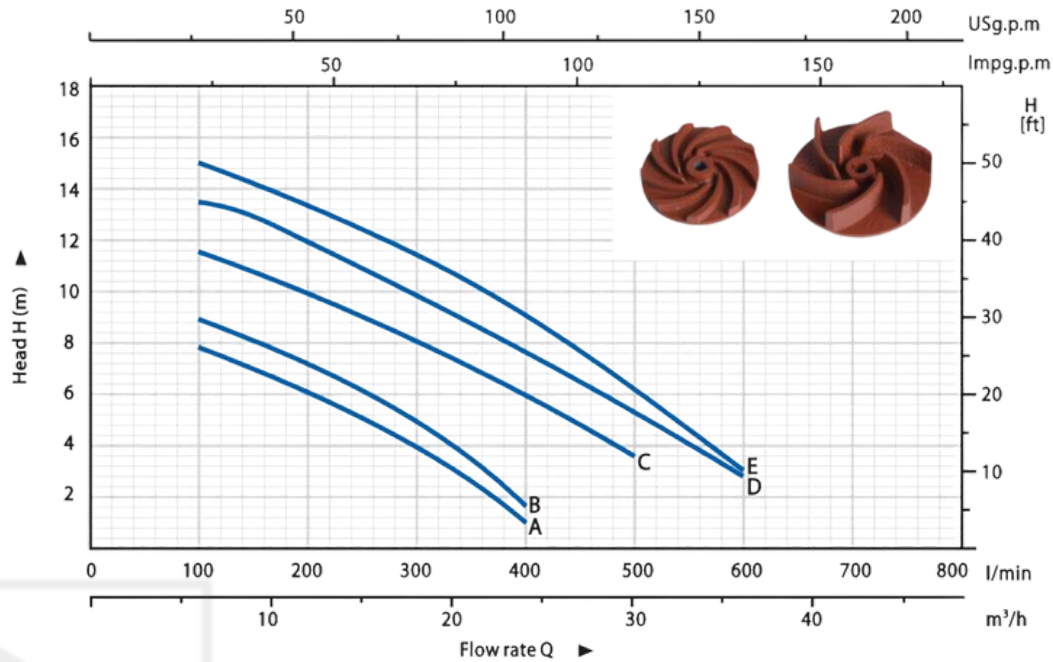

### Typical Applications

- Municipal wastewater treatment- Clearing sewage from urban areas for safe disposal and environmental protection.
- Industrial facilities- Managing wastewater laden with contaminants from manufacturing processes efficiently.
- Residential buildings- Disposing of domestic sewage effectively for a clean living environment.
- Hospitals- Handling medical waste and sanitary sewage to maintain hygiene standards.
- Schools- Handling sewage from restrooms and facilities to ensure a healthy learning environment.
- Shopping malls- Disposing of wastewater from restrooms, restaurants, and cleaning activities for cleanliness.
- Construction sites- Removing groundwater and wastewater from excavation sites for safety and compliance.

### Operating Conditions

- 5m maximum immersion depth
- Liquid temperature up to 35°C
- Maximum ambient temperature 40°C

### Motor

- Two-pole induction motor(n=2850 r.p.m)
- Insulation Class B
- Protection IP68
- Continuous service S1
- Thermal protector for single phase

### Technical Data

NO.	MODEL	Power		OUTLET (Inch)	Weight (Kg)	Max. Particle Size (mm)	Dimension		
		HP	kW				L	W	H
A	SWVP 07A	0.77	0.55	2"	16.5	35	285	198	470
B	SWVP 10A	1	0.75	2"	17.5		285	198	480
C	SWVP 15A	1.5	1.1	2"	19.5		285	198	500
D	SWVP 20A	2	1.5	2"	21.5		285	198	520
E	SWVP 30A	3	2.2	2"	22.5		285	198	540

