



SSP 3 Submersible Pump

Performance Curves

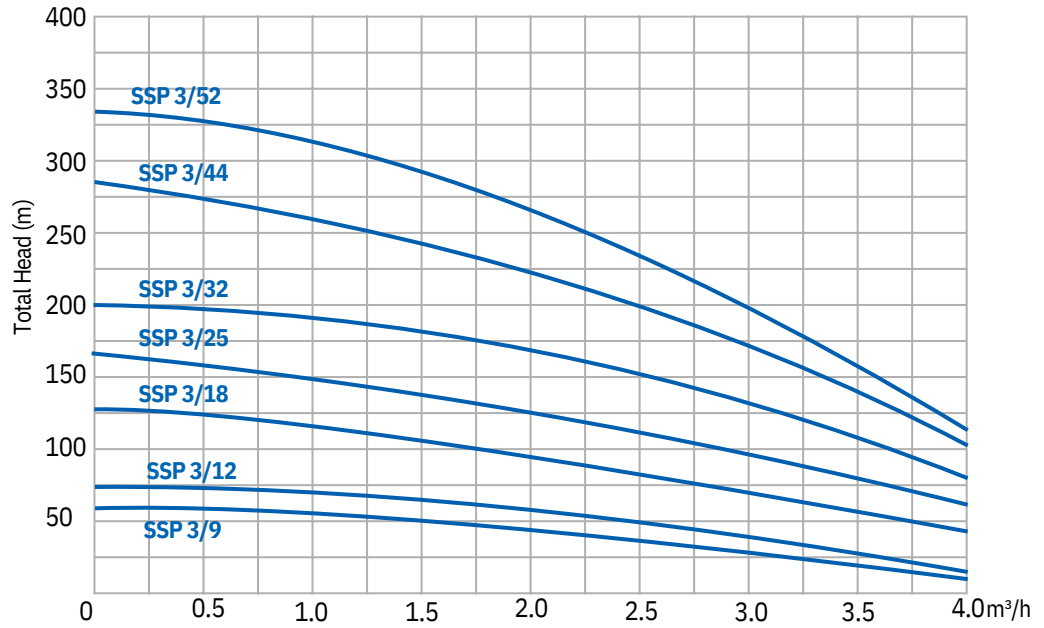

Typical Applications

- Agriculture Irrigation Systems
- Residential Water Supply
- Commercial Water Distribution
- Industrial Water Extraction
- Municipal Water Management

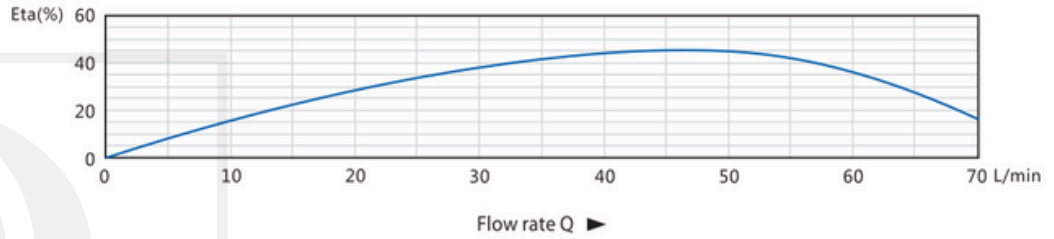

Operating Conditions

- Water temperature up to 35°C
- Ambient temperature permissible up to 40°C
- Minimum internal diameter of well- 6"(150mm)
- Maximum sand content- 0.25%
- Maximum immersion depth- 80m

Motor

- Rewindable motor
- Insulation Class B
- Protection IP68
- Speed RPM 2850

Technical Data

Model	Motor		Voltage (V)		Current (A)	DN(")	Dimensions(mm)			Weight (kg)
	kW	HP	220-240	380-415			P	M	T	
SSP 3/9	0.55	0.75	220-240		4.3	1 1/2	344	378	672	11
SSP 3/12	0.75	1	220-240		5.4	1 1/2	407	398	755	13
SSP 3/18	1.1	1.5	220-240	380-415	6.8	1 1/2	533	438	921	16
SSP 3/25	1.5	2	220-240	380-415	8.7	1 1/2	680	515	1145	21
SSP 3/32	2.2	3	220-240	380-415	12.8	1 1/2	827	590	1367	26
SSP 3/44	3	4		380-415	6.7	2 1/2	1079	605	1634	30
SSP 3/52	4	5.5		380-415	8.9	3 1/2	1247	723	1920	34

